

PM type Stepping Motor MSAW/MSAWS series

■ MSAW /MSAWS series



■ Standard specifications

Size (mm)	Φ7.5 × H6 × L14	
Weight (g)	7.0	
Resistance (Ω)	13	
Rated voltage (V)	4.0	
Driving waveform	Rectangle	
Excitation	2 phase	
Step angle (°)	22.5	
Step accuracy (%)	25	
Holding torque (mN·m)	0.8	
Detent torque (mN·m)	0.08	
Max self start frequency (pps)	1400	
Power supply type	FPC	○
	Lead wire	
	Pin connector	
Operating temperature (°C)	-10~70	



■ Applications

Information equipment

■ Characteristics

REACH and RoHS
compliant

■ Dimensions/Torque characteristic

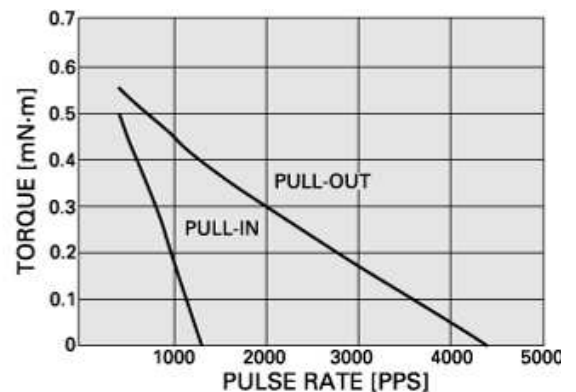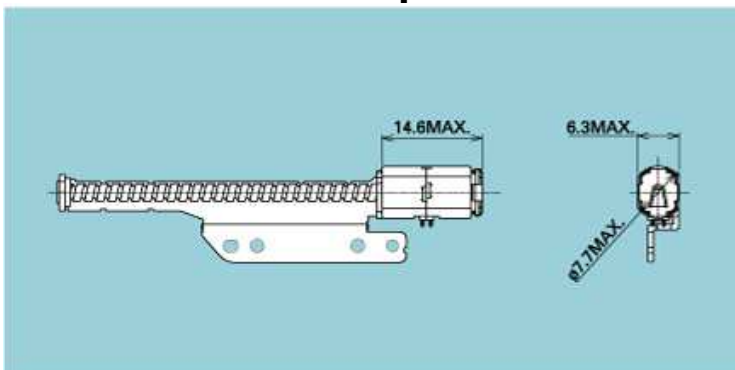

Characteristic data is based on standard specifications

NIDEC SANKYO CORPORATION

For additional information, please contact our sales.

Tokyo Office

Nidec Tokyo Bldg., 1-20-13 Osaki, Shinagawa-ku, Tokyo 141-0032, Japan Tel:(81)3-5740-3000