

# PM type Stepping Motors MSCT/MSCTS series

## ■ MSCT /MSCTS series



## ■ Applications

Information equipment



## ■ Characteristics

REACH and RoHS  
compliant

## ■ Standard specifications

Size (mm)	Φ7 × H5 × L14	
Weight (g)	5.2	
Resistance (Ω)	14.5	
Rated voltage (V)	4.0	
Driving waveform	Rectangle	
Excitation	2 Phase	
Step angle (° )	22.5	
Step accuracy (%)	25	
Holding torque (mN·m)	0.45	
Detent torque ( mN·m )	0.044	
Max self start frequency (pps)	1300	
Power supply type	FPC	○
	Lead wire	
	Pin connector	
Operating temperature (°C)	-10~70	

## ■ Dimensions / Torque characteristics

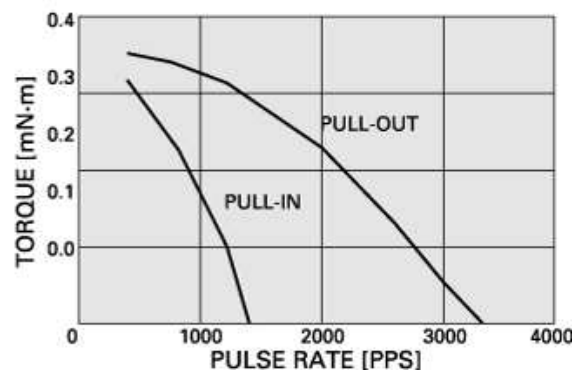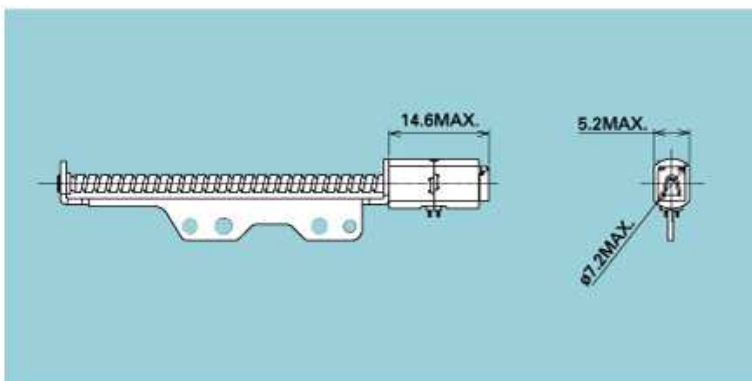

Characteristic data is based on standard specifications

## NIDEC SANKYO CORPORATION

For additional information, please contact our sales.

### Tokyo Office

Nidec Tokyo Bldg., 1-20-13 Osaki, Shinagawa-ku, Tokyo 141-0032, Japan Tel:(81)3-5740-3000