

PM type Stepping Motors MSEU series

MSEU series



Applications smartphone


Standard specifications

Size(mm)	Ф5×L5.7
Weight(g)	0.6
Resistance (Ω)	14
Rated voltage (V)	5
Driving waveform	2 phase
Excitation	bi-polar
Step angle (deg.)	18
Holding torpue(mN·m)	0.35
Max self start frequency(pps)	3500
Operating temperature (°C)	-20~60

Characteristics

- •The motor has an optimized magnetic circuit design for smartphones and mobile devices.
- •The torque of this motor is equivalent to that of a motor one size larger, making it suitable for space saving.

■ Dimensions / Torque characteristic

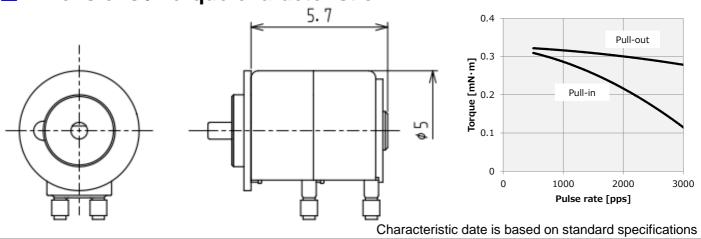

NIDEC SANKYO CORPORATION

For additional information, please contact our sales.

Tokyo Office