

PM type Stepping Motors MSHR series

■ MSHR series



■ Applications

Camera instrument



■ Characteristic

REACH and RoHS compliant
Low noise

■ Standard specifications

Size (mm)	Φ6.5 × L7.5	
Weight (g)	1.6	
Resistance (Ω)	40	
Rated voltage (V)	3.0	
Driving waveform	Rectangle	
Excitation	2 phase	
Step angle (°)	18.0	
Step accuracy (%)	25	
Holding torque (mN·m)	0.3	
Detent torque (mN·m)	0.05	
Max self start frequency (pps)	1800	
Power supply type	FPC	○
	Lead wire	
	Pin connector	
Operating temperature (°C)	-10 ~ 70	

■ Dimensions / Torque characteristic

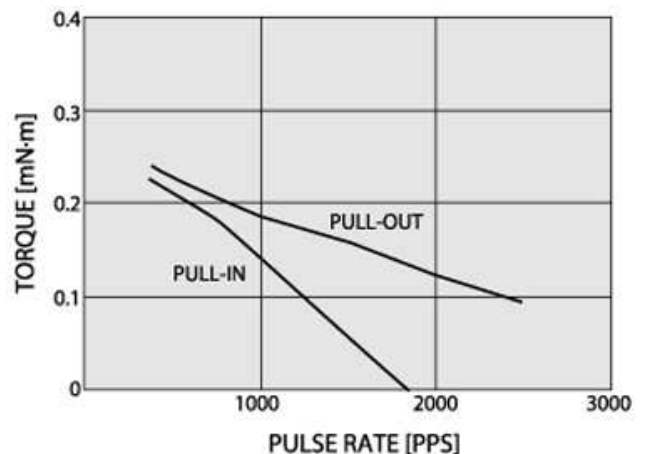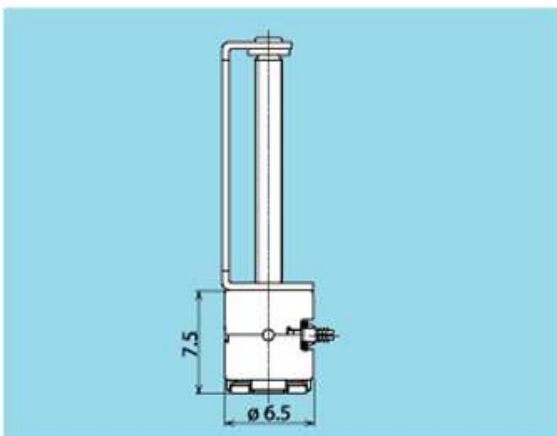

Characteristic data is based on standard specifications

NIDEC SANKYO CORPORATION

For additional information, please contact our sales.

Tokyo Office

Nidec Tokyo Bldg., 1-20-13 Osaki, Shinagawa-ku, Tokyo 141-0032, Japan Tel:(81)3-5740-3000